


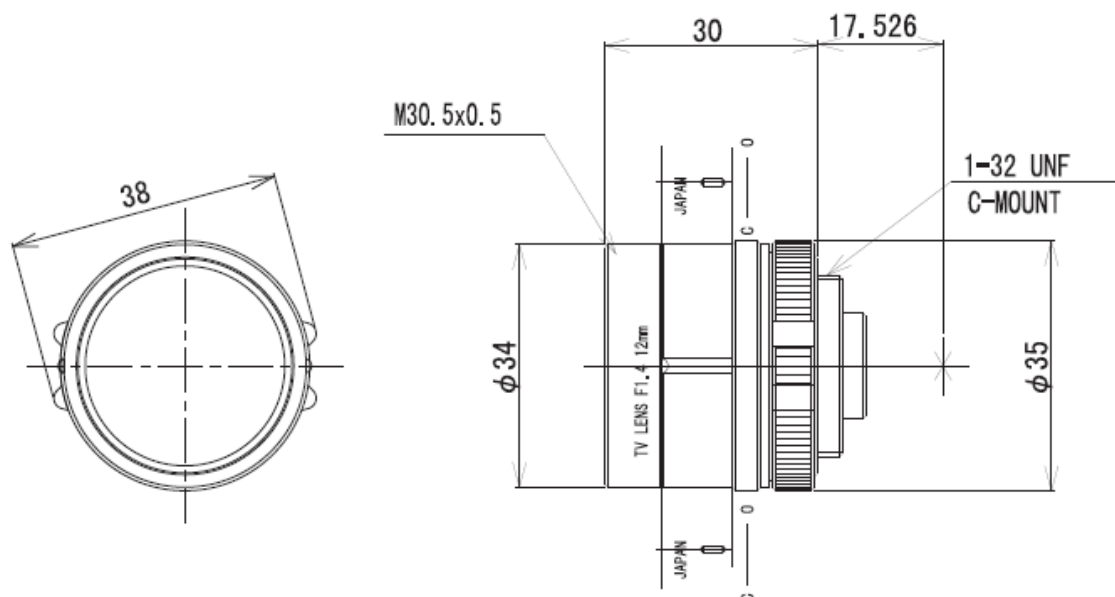

1/2" 1.4/ 12mm C		1/3"
Focal Length		f=12mm±5%
Max. Diameter (Ratio)		F=1 : 1.4±5%
Elements		5 Group 6 Elements
Picture Size		4.8x6.4mm 3.6x4.8
Angle	Ver.	23.0° 17.2°
	Hor.	30.7° 23.0°
	Dia.	38.5° 28.8°
Distortion (TV)		-0.8%
Shooting Range at M.O.D.	Ver.	123mm
	Hor.	167mm
	Dia.	213mm
Minimum Object Distance		0.3m
Flange Back		17.526 ^{+0.13} ₋₀ mm in air
Back Focus		11.12mm in air
Filter Screw Size		M30.5x0.5
Front/Rear Effective Dia.		F: φ12.3mm R: φ11.7mm
Mount		C-MOUNT
Exit Pupil		-38.9mm
Temperature Range		-10~+45° C
Storage Temperature Range		-40~+60° C
Resolution		Center: 100 LP/mm Corner: 40LP/mm
Stopper Strength		10kgf · cm
Endurance Tests		Iris: 5,000Times Focus: 5,000Times
Operating Torque		Iris: 50~600gf · cm Focus: 100~1000gf · cm
Weight		53g±5g

LM12NCR