


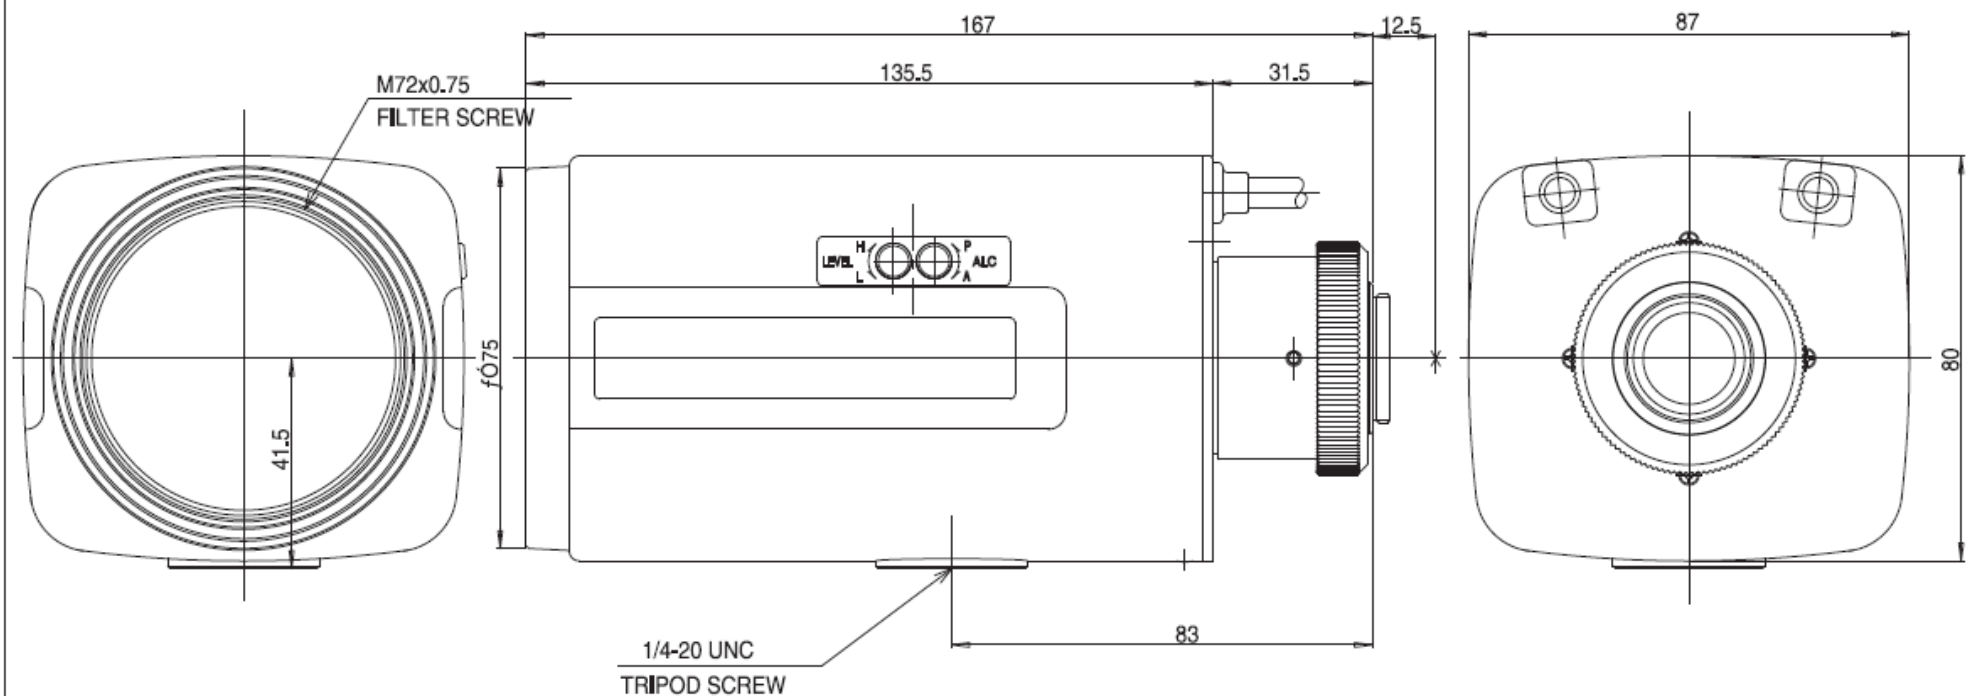


① IRIS CABLE

(+) RED	INPUT VOLTAGE
(-) BLACK	GROUND
WHITE	VIDEO SIGNAL
GREEN	REMOTE CONTROL

② MOTOR CABLE

(+) GREEN	FOCUS NEAR
(+) BLACK	FOCUS FAR
(+) YELLOW	ZOOM IN
(+) RED	ZOOM OUT

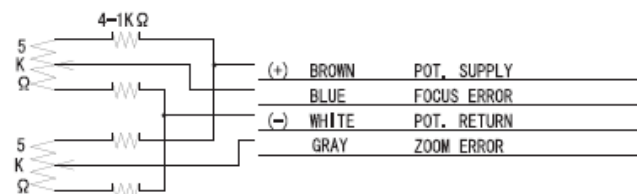


SPECIFICATION

1. USE	FOR 1/3" COLOR B/W CAMERA		
2. FOCAL LENGTH	f=5.5 ~ 165 mm		
3. IRIS RANGE	F=1.8 ~ 500 ~ Close		
4. IMAGE SIZE	ϕ 6 (4.8x3.6)		
5. BACK FOCAL LENGTH	15.5 mm in air		
6. FLANGE FOCAL LENGTH	12.5 mm in air		
7. FOCUS RANGE	$\infty \sim 1.8$ m		
8. FIELD ANGLE	DIA.	(W)	(T)
	HOR.	58.7 °	2.10 °
	VER.	47.6 °	1.70 °
	HOR.	33.9 °	1.30 °
9. FIELD OF VIEW AT W.O.D.	DIA.	1,879 mm	62.8 mm
	HOR.	1,492 mm	50.6 mm
	VER.	1,107 mm	38.1 mm
10. DISTORTION	-2.5 % 0.7 %		
11. LENS CONSTRUCTION	12 GROUPS 14 ELEMENTS		
12. CLEAR APERTURE	FRONT	ϕ 60	REAR ϕ 10.5
13. EXIT PUPIL POSITION	-70.0 mm (format)		
14. WEIGHT	850 g (880 g)		

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190 Ω (20° C)
BRAKE COIL	COLOR	RED (+) BLACK
DRIVE VOLT.	RESISTOR	1150 Ω (20° C)
	COLOR	YELLOW (+) GREEN
	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V
		W/CLOSING SPRING



AUTO IRIS
1/3" F1.8/5.5 ~ 165mm

LMZ300AM AMP
LMZ300AMDC AMPDC