




| 1" 2.4/4.7mm C                                 |            | 1"                                     | 2/3"      | 1/1.8"    |
|------------------------------------------------|------------|----------------------------------------|-----------|-----------|
| FOCAL LENGTH                                   |            | f=4.7mm                                |           |           |
| MAX. DIAMETER (RATIO)                          |            | F=1:2.4~11                             |           |           |
| ELEMENT                                        |            | 11 GROUPS 15 ELEMENTS                  |           |           |
| PICTURE SIZE                                   |            | 9.6x12.8mm                             | 6.6x8.8mm | 5.4x7.2mm |
| ANGLE                                          | VER. ANGLE | 95.4°                                  | 72.2°     | 60.8°     |
|                                                | HOR. ANGLE | 112.2°                                 | 90.0°     | 77.4°     |
|                                                | DIA. ANGLE | 123.0°                                 | 103.7°    | 91.4°     |
| DISTORTION (TV)                                |            | -0.58%                                 |           |           |
| SHOOTING RANGE AT<br>MINIMUM FOCUS<br>DISTANCE | VER.       | 272.1mm                                | 178.8mm   | 143.6mm   |
|                                                | HOR.       | 375.6mm                                | 246.6mm   | 196.8mm   |
|                                                | DIA.       | 480.5mm                                | 317.3mm   | 253.0mm   |
| MINIMUM FOCUS DISTANCE                         |            | 0.1m                                   |           |           |
| FLANGE BACK                                    |            | 17.526mm in air                        |           |           |
| BACK FOCUS                                     |            | 9.0mm in air                           |           |           |
| FILTER SCREW SIZE                              |            | -                                      |           |           |
| FRONT/REAR EFFECTIVE DIA.                      |            | FRONT $\phi$ 60.5mm REAR $\phi$ 14.8mm |           |           |
| MOUNT                                          |            | C-MOUNT                                |           |           |
| EXIT PUPIL                                     |            | -128.6mm                               |           |           |
| TEMPERATURE RANGE                              |            | -10~+50°C                              |           |           |
| STORAGE TEMPERATURE RANGE                      |            | -20~+60°C                              |           |           |
| RESOLUTION CENTER/CORNER                       |            | CENTER 100lp/mm CORNER 50lp/mm         |           |           |
| LENS COATING                                   |            | WIDE BAND MULTI COATING                |           |           |
| WEIGHT                                         |            | 360g                                   |           |           |

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

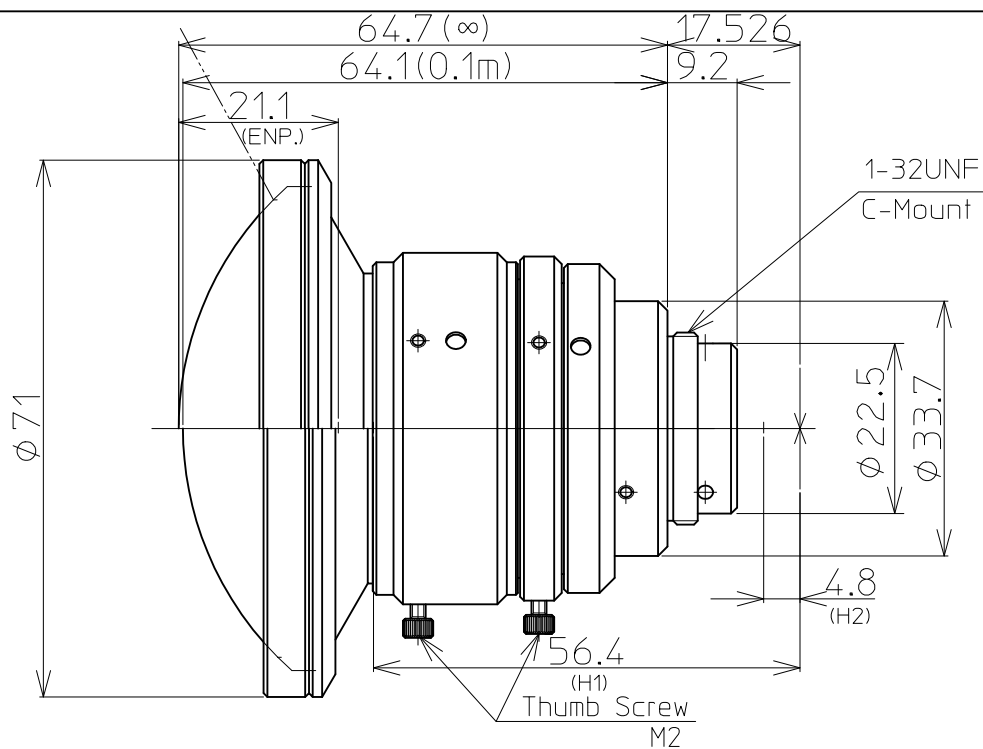

|            |        |     |                 |      |         |
|------------|--------|-----|-----------------|------|---------|
|            |        | 尺度  | 1/1             | 工場番号 | S10-569 |
|            |        | 機種名 | 1" F2.4 f=4.7mm |      |         |
| 2020.02.10 | 114 変更 | 機種番 | LM4HC 外観図       |      |         |
| 2019.07.07 | 作成年月日  |     |                 |      |         |