




2/3" 1.4/16mm C		2/3"	1/1.8"	1/2"
FOCAL LENGTH		f=16mm		
MAX. DIAMETER (RATIO)		F=1:1.4~16		
ELEMENT		9 GROUPS 10 ELEMENTS		
PICTURE SIZE		6.6x8.8mm	5.4x7.2mm	4.8x6.4mm
ANGLE	VER. ANGLE	22.7°	18.6°	16.6°
	HOR. ANGLE	29.9°	24.7°	22.0°
	DIA. ANGLE	36.9°	30.6°	27.3°
DISTORTION (TV)		0.03%		
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	48.4mm	39.6mm	35.2mm
	HOR.	64.6mm	52.9mm	47.0mm
	DIA.	81.1mm	66.3mm	58.8mm
MINIMUM FOCUS DISTANCE		0.1m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		11.6mm in air		
FILTER SCREW SIZE		M30.5x0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT ϕ 24.5mm REAR ϕ 16.6mm		
MOUNT		C-MOUNT		
EXIT PUPIL		-105.7mm		
TEMPERATURE RANGE		-10~+50°C		
STORAGE TEMPERATURE RANGE		-20~+60°C		
RESOLUTION CENTER/CORNER		CENTER 160本/mm CORNER 100本/mm		
WEIGHT		125 g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

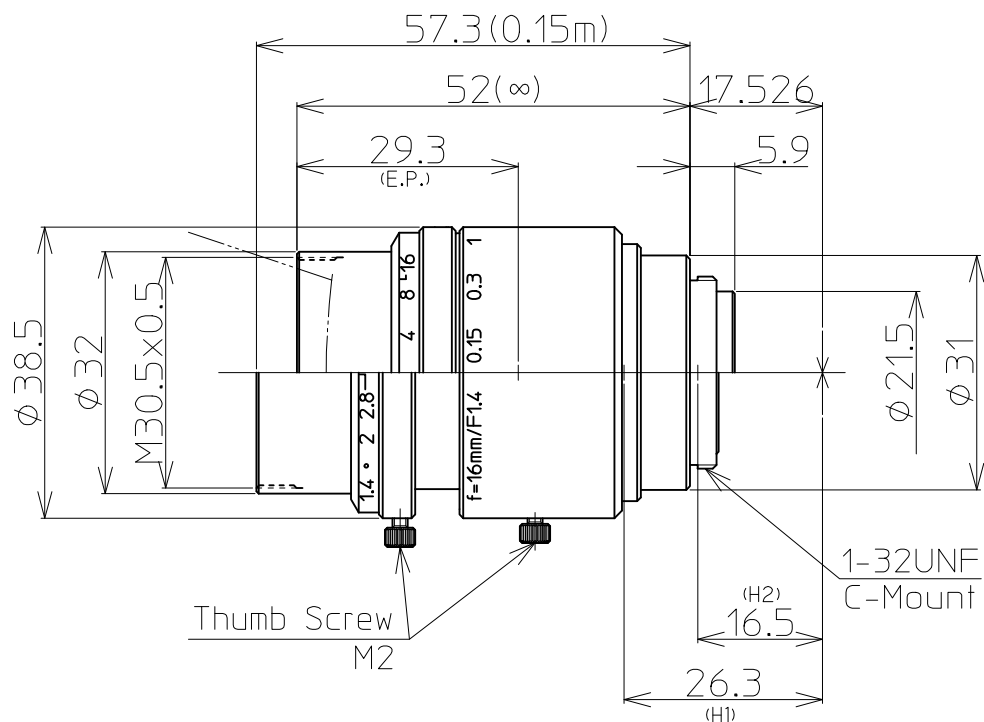

		尺 度	1/1	工場 番 号	CH1053
		機 種 名	2/3" F1.4 f=16mm		
2014.12.25	更新	機 種 番	LM16JC5M2 外観図		
2013.4.15	作成年月日				